

**100% NITRILE FULLY COATED, LENGTH 30CM**

Offering high resistance to chemicals and protection against abrasion. For demanding tasks that require manual exertion and complete control over work materials in wet / oily handling conditions.

**FEATURES**

- › A fine, supple glove (1.23mm thick)
- › Nitrile protects the hand from oils, hydrocarbons and grease penetration
- › Rough finish provides a tactile feel, long-lasting grip and control in wet/oily conditions
- › Impermeable for working in damp or oily environments
- › Designed for easy movement and continuous wear
- › Good abrasion resistance
- › Seamless knit designed to prevent irritation
- › Anatomically formed



**SUITABLE FOR**

**Typical Industries**

- Agriculture
- Chemical
- Construction
- Fishing/Marine
- Food
- Manufacturing
- Oil and Gas
- Pharmaceutical

**Suitable Applications**

- Assembly
- Chemical processing
- Cleaning
- Food Handling
- Handling wet/oily Objects
- Heavy duty handling
- Plant maintenance
- Refining

**CERTIFICATION**

CAT III	EN 388:2016	EN ISO 374-1:2016/Type A	EN ISO 374-5:2016	EN 407:2004	
0598	3132A	JKLMNOPT	X1XXXX		

See overleaf for explanation



# CS720

## PRODUCT INFORMATION

MATERIALS	LINER:	Polyester
	COATING:	Nitrile
COLOUR	Blue	
LENGTH (mm)	300 (size dependent)	
CUFF STYLE	Gauntlet	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SHO7201	10 pairs individually packed per bag
8/M	SHO7202	
9/L	SHO7203	
10/XL	SHO7204	
11/XXL	SHO7205	60 pairs per case

## RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal (beyond 100C), electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS




### MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*



\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



### HEAT AND FIRE EN 407

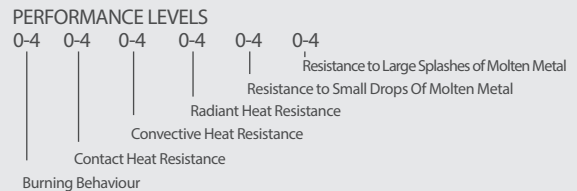

### RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL
A	Methanol	J	n-Heptane
B	Acetone	K	Sodium hydroxide 40%
C	Acetonitrile	L	Sulphuric acid 96%
D	Dichloromethane	M	65% Nitric acid
E	Carbon Disulfide	N	99% Acetic acid
F	Toluene	O	25% Ammonium hydroxide
G	Diethylamine	P	30% Hydrogen peroxide
H	Tetrahydrofuran	S	40% Hydrofluoric acid
I	Ethyl acetate	T	37% Formaldehyde

TYPE OF GLOVES	BREAKTHROUGH TIME
A	≥30 min for at least 6 chemicals
B	≥30 min for at least 3 chemicals
C	≥10 min for at least 1 chemical



### PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



### FOOD CONTACT DIRECTIVE EC 10/2011

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SHO-DATA-CS720\_0621\_3