




Beta 1™

ONE OF THE LIGHTEST GLOVES IN THE INDUSTRY FOR MAXIMUM COMFORT

The patented nitrile foam coating efficiently channels excess fluid from the glove's surface and the glove provides good grip in damp, oily or dry conditions.

FEATURES

- › Patented nitrile foam coating enhances protection as well as providing good wet grip by channeling away excess fluid from the glove surface
- › Excellent resistance to abrasion
- › Flexible and comfortable, with excellent dexterity
- › Good grip in damp, oily or dry conditions
- › Solid knit wrist provides a secure fit
- › Tested for harmful substances according to Oeko-Tex® Standard 100
- › Lightweight 18 gauge seamless liner
- › Light thermal protection up to 100°C for a short period
- › Touchscreen capabilities to allow usage with screen devices



SUITABLE FOR


Typical Industries

- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport
- Utilities

Suitable Applications

- Assembly
- Final Fix
- Goods Handling
- Handling Mildly Abrasive Surfaces
- Light Fabrication
- Supervision

CERTIFICATION

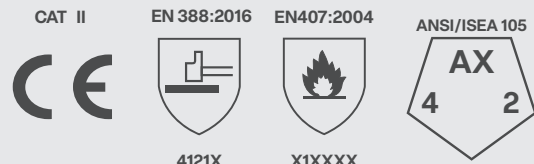

See overleaf for explanation



Beta 1™

PRODUCTION INFORMATION

MATERIALS	LINER:	18 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKY500	10 pairs per bag
7/S	SKY501	
8/M	SKY502	120 pairs per case
9/L	SKY503	
10/XL	SKY504	
11/XXL	SKY505	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

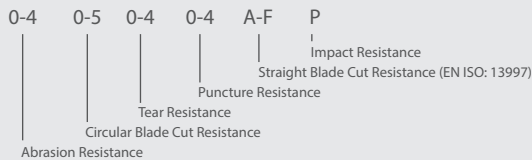


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

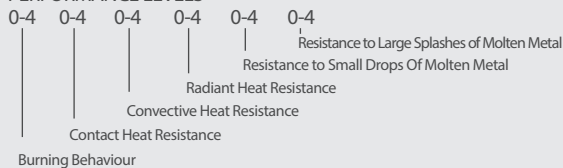

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15V2P, Republic of Ireland. (Notified Body No. 2777).

UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.